

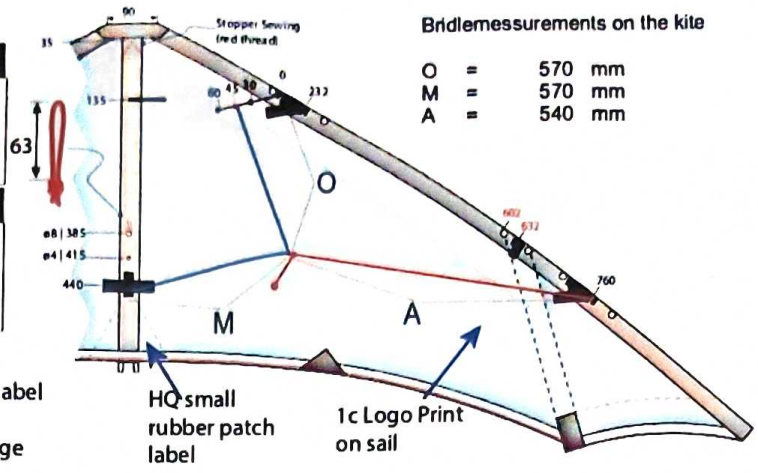


**MATERIAL**

SAIL	NOSE	LEADING E.	TRAILING E.
70D Polyester Mylar	Tarpaulin red 50 mm	Dacron 50 mm cut: 	Rollseam standard
REINFORC.	Bridle Line	Tension Line	Sewing
Dacron	100kp corded dyneema / red	Dyneema 70kp Loop on spiltnock	SA = 8mm



HQ safety label  
backside  
leading edge



Bridle measurements on the kite

- O = 570 mm
- M = 570 mm
- A = 540 mm


**Frame:**

#	Length	Material
spine	1 565 mm	Ø6 carbon-tube
upper spreader	1 435 mm	Ø6 carbon-tube
lower spreader	2 640 mm	Ø8 carbon-tube (with 80mm plugs on ferrule side)
Lead. Edge	2 1140 mm	Ø6 carbon
Stand Off	2 145 mm	Ø2.5 solid wrapped fibreglas
spine batten	1 510 mm	Ø2.5 solid wrapped fibreglas
sail batten	2 320 mm	Ø4 solid fibreglas black


**Fittings**

#	Size
1	NP T-Piece ø8/6 mm
2	HQ LE-Connector ø6 mm
2	NP LE-Connector ø8 mm
1	HQ LE-Connector ø4mm
4	HQ Standoff Connector big
3	Endcap ø5,5 mm
3	HQ-Spiltnock ø6 mm
12	Stopper-Clip ø6 mm
2	NP Standoff Sail Screw 2.5 mm
2	NP Endcap 2.5 mm
4	Endcap 3 mm soft
2	Endcap 2.5 mm


lower spreader



leading edge

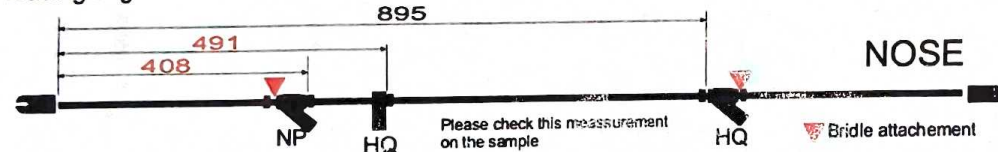

Spine



**Accessories**

BAG	WINDER	CONTROL	LINES	MANUAL	CD	LABELS	HEADER	HANGTAG	WEIGHTS
HQ Sportkite Bag 2015	<b>NO</b>	<b>NO</b>	<b>NO</b>	Compl. HQ Stuntkite Manual productinfo (DIN long)	<b>NO</b>	HQ safety	<b>NO</b>	standard laminated	<b>NO</b>



invento  
AlexH  
AlexH

2015-01-20  
2014-12-03